

HSF 禁止使用1级环境管理物质

Note:

Materials:

.Plunger: Brass 60u" Au over Ni

.Barrel: Brass 60u" Au over Ni

.Spring: SUS Au

Mechanical:

.Contact force: 100g±25g at 0.9mm working stroke


.Life test: 20,000 cycles

Electrical:



.Rated current & voltage: DC 12V; 1A

.Contact resistance: 50 milliohm Max.

To ensure the best usage, please operate it based on the working height.
Based on the engineering drawings, shall not exceed the maximum allowed compression.

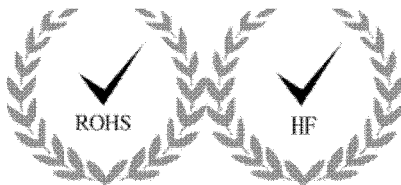

Approve Sign

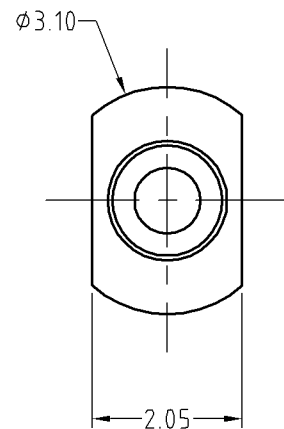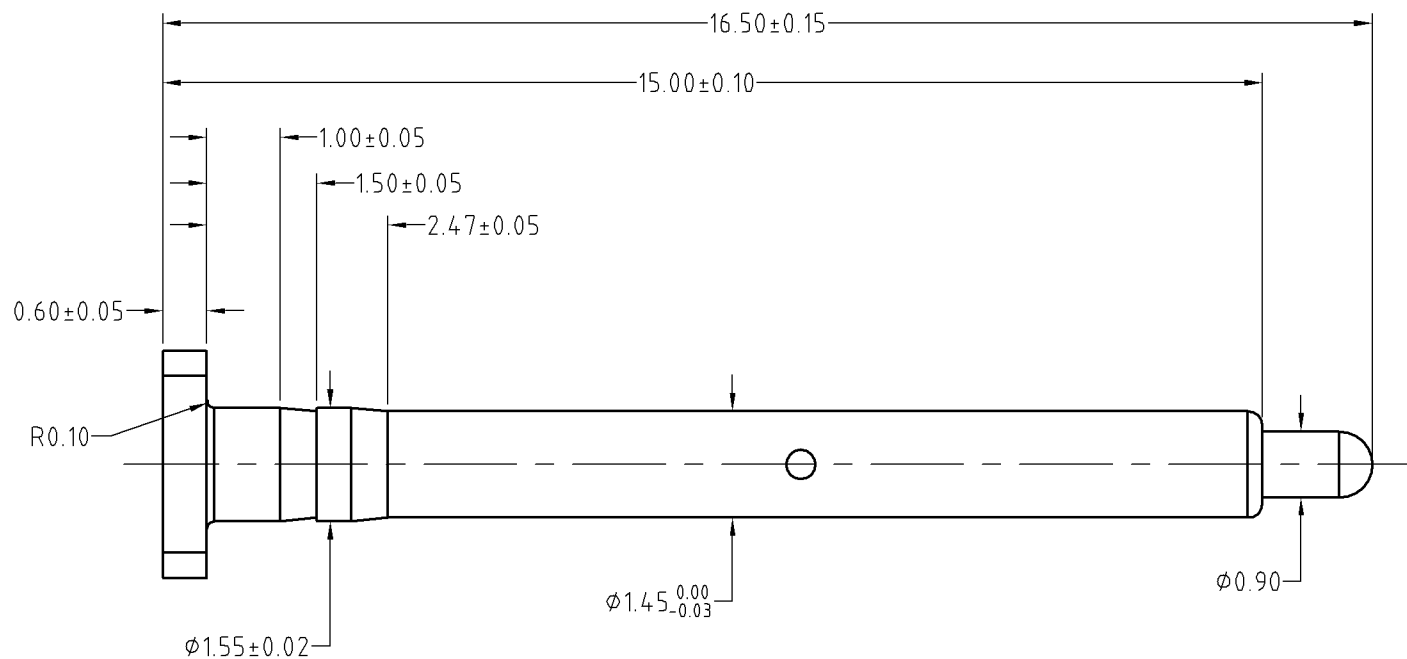

20131219001	A1	2013.12.19	修改 针管底部不倒角, 去掉 R0.2
	A0	2013.10.21	NEW
ECN(DCN) NO.	REV	DATE	DESCRIPTION

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.			
ANGEL	±1°	A4	SHEET: 1 of 1			
0~6	±0.05					
6~30	±0.10	DRAW				
30~120	±0.15	CHECK				
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO				
			PART NO.	BF00261		
			FILE NAME	BF00211		
			TITLE.	Pogo pin connector		



东莞市川富电子有限公司
CFE CORPORATION CO.,LTD.