HSF	禁止使用1級環境管理物質

Note:
1. Mechanical demands
   1. Contact force: 150g min. at 1.0mm working stroke
   2. Plating plunger: 1u" Au over Ni.
      Plating barrel: 1u" Au over Ni.
2. Inspection
   1. Rated current & voltage: DC12V; 1A
   2. Life test: 10,000 cycles
   3. Contact resistance: 50 mohm Max. at working height

Approve Sign

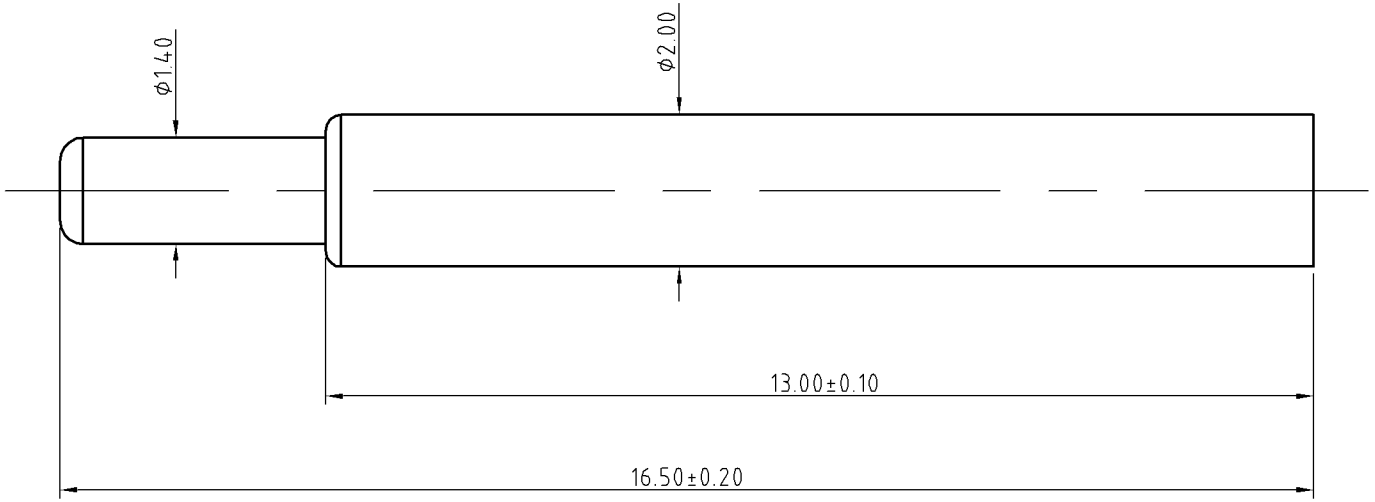

						Angle	±1°	MAT'L			TITLE.		Pogo pin		
						0.0000	±0.01	COLOR	———						
						0.000	±0.02	DRAW	Simon	2012.09.13					
						0.00	±0.05	DESIGN			PART NO.		BF02811		
———	D0	2012.08.23	NEW			0.0	±0.10	CHECK			FILE NAME		BF02811		
ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO			SCALE	1:1	UNIT: mm	A4	SHEET: 1 of 1

091210-BI051