

HSF 禁止使用1级环境管理物质

Approve Sign

Note:

1.Mechanical demands

.Contact force: 300g±20% at 1.0mm working stroke

.Plating plunger: Brass 3u" Au over 50u" Ni.


.Plating barrel: Brass 3u" Au over 50u" Ni.

2.Inspection(working stroke)

.Rated current & voltage: DC12V; 1A

.Life test: 20,000 cycles

.Contact resistance: 30 milliohm Max.

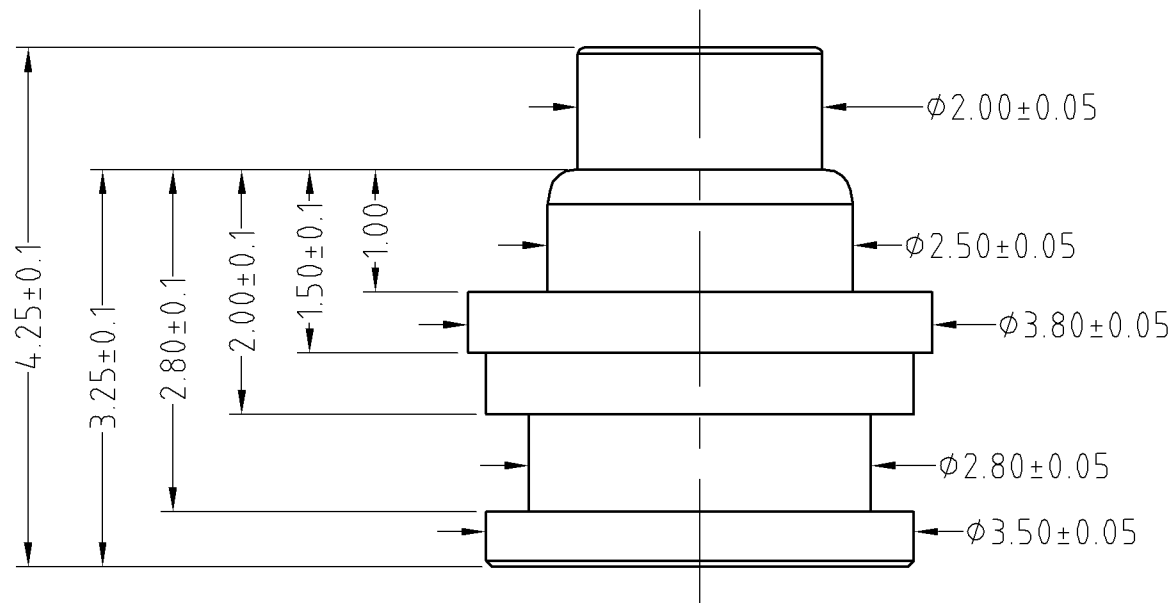

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.			
ANGEL	±1°	A4				
0.000	±0.02		SHEET: 1 of 1			
0.00	±0.05	DRAW			PART NO.	BF09611
0.0	±0.10	CHECK			FILE NAME	BF09611
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO			TITLE.	Pago pin connector

_____	D0	2013.05.30	NEW		
ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO