

1

2

3

4

HSF 禁止使用1级环境管理物质

Approve Sign

Note:

Materials:

.Plunger: Brass 50u" Au over 50u" Ni

.Barrel: Brass 30u" Au over 50u" Ni

.Spring: SUS

Mechanical:


.Contact force: 110g±20% at 2.60 working height

.Life test: 20,000 cycles

Electrical:

.Rated current & voltage: DC 12V; 3A Max.

.Contact resistance: 50 milliohm Max.

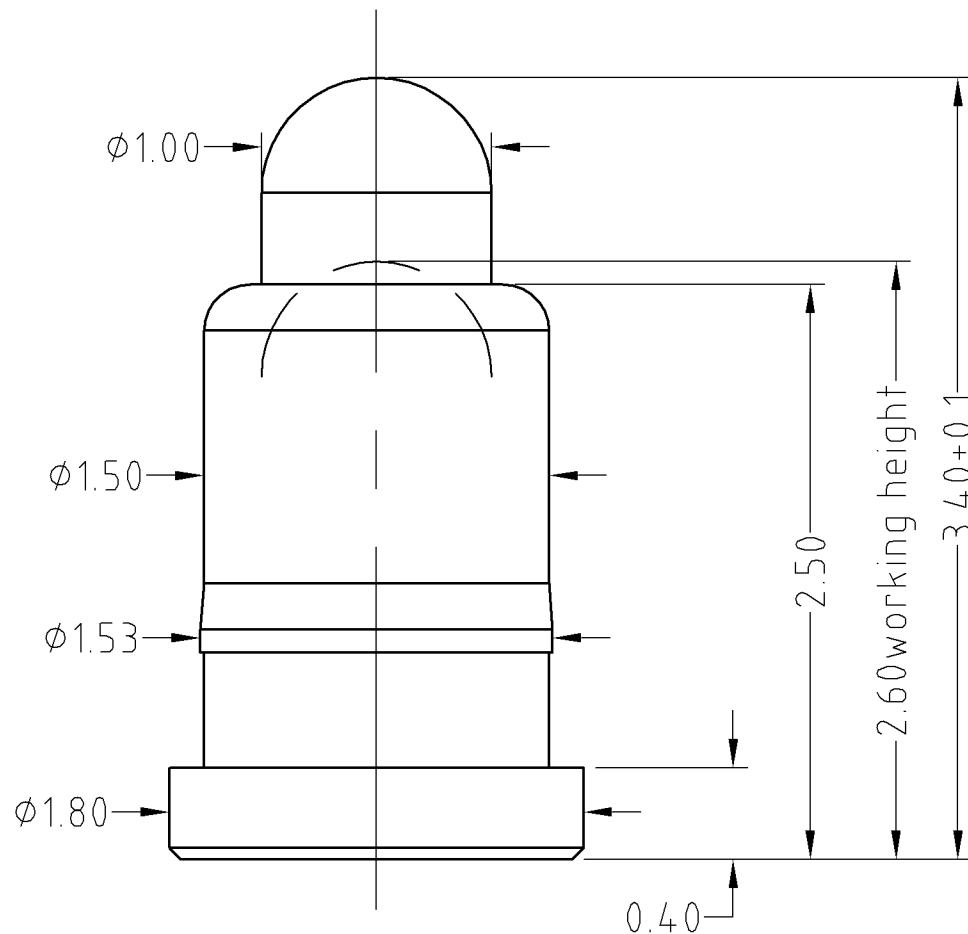

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		CFE 东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.	
ANGEL	±1°	A4				
0.000	±0.02		SHEET: 1 of 1		PART NO.	BF10413
0.00	±0.05	DRAW			FILE NAME	BF10413
0.0	±0.10	CHECK			TITLE	Pogo pin connector
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO				

ECN(DCN) NO.	D0	2013.07.06	NEW		
REV	DATE	DESCRIPTION	CHANGE	APPRO	