

1

2

3

4

Note:

Materials:

.Plunger: Brass 3u" Au over Ni

.Barrel: Brass 3u" Au over Ni

.Spring: SUS

Mechanical:

.Contact force: 100g±20% at 1.0mm working stroke

.Max. stroke: 1.2mm

.Life test: 20,000 cycles

Electrical:

.Rated current & voltage: DC 12V; 1A


.Contact resistance: 50 milliohm Max.

To ensure the best usage, please operate it based on the working height.

Based on the engineering drawings, shall not exceed the maximum allowed compression.



Approve Sign

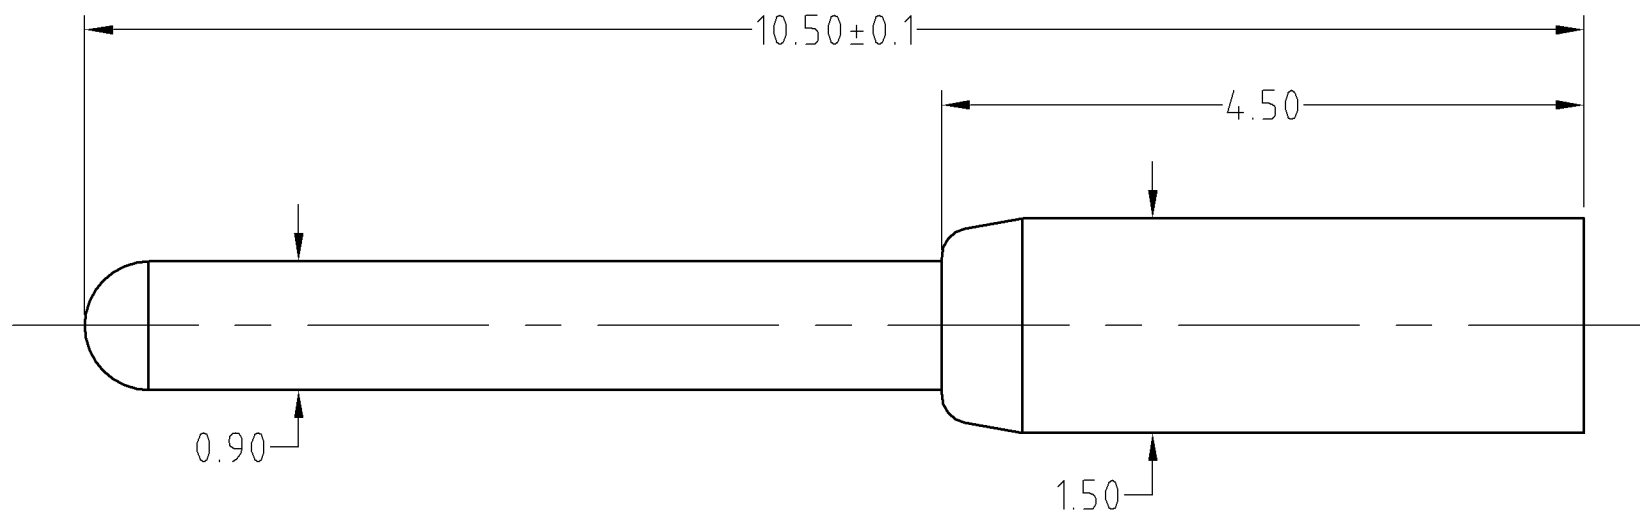

	A0	2014.03.01	NEW
ECN(DCN) NO.	REV	DATE	DESCRIPTION

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		CFE 东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.	
ANGEL	±1°	A4				
0~6	±0.05		SHEET: 1 of 1		PART NO.	BF15711
6~30	±0.10	DRAW			FILE NAME	BF157XX
30~150	±0.15	CHECK			TITLE	Pogo pin connector
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO				