

1

2

3

4

Note:

Materials:

Plunger: Brass 16u" Au over Ni

Barrel: Brass 4u" Au over Ni

Spring: SUS 304

Mechanical:

Contact force: 60g±10g at 1.70mm working height

Life test: 10,000 cycles

Electrical:

Rated current & voltage: DC 5V; 1A



Contact resistance: 100 milliohm Max.

To ensure the best usage, please operate it based on the working height.

Based on the engineering drawings, shall not exceed the maximum allowed compression.



Approve Sign

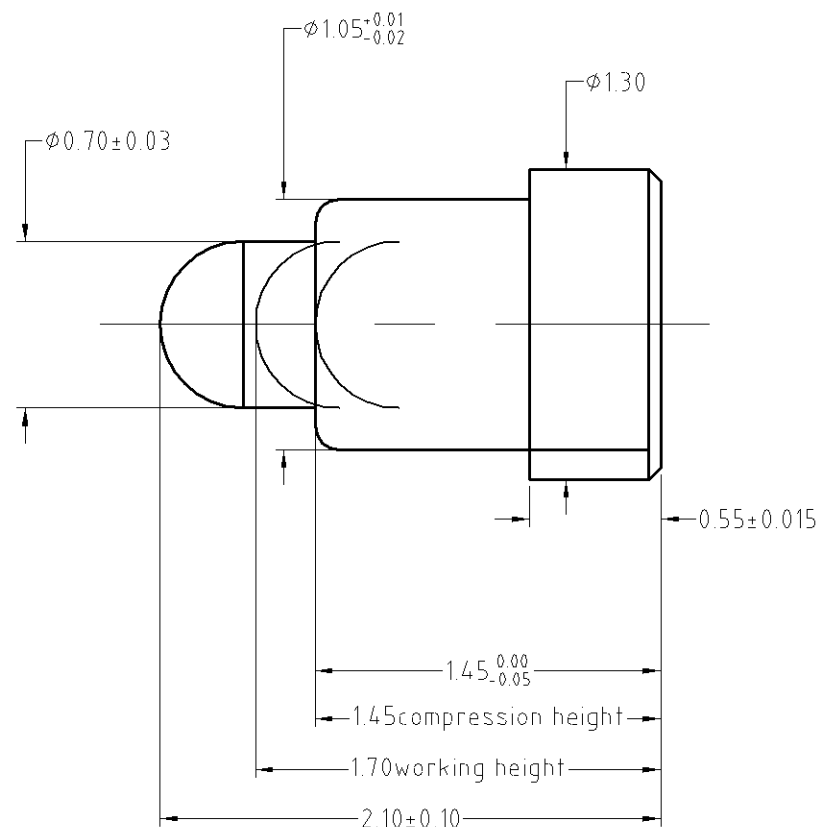

B

C

D

_____	D0	2013.05.30	NEW
ECN(DCN) NO.	REV	DATE	DESCRIPTION

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		 东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.	
ANGEL	±1°	A4				
0~6	±0.05		SHEET: 1 of 1		PART NO.	BF18311
6~30	±0.10	DRAW			FILE NAME	BF183XX
30~150	±0.15	CHECK			TITLE	Pogo pin connector
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO				