

1

2

3

4

Note:

Materials:

.Plunger: Brass 100u" Au over Ni

.Barrel: Brass 100u" Au over Ni

.Spring: SUS Au

Mechanical:

.Contact force: 190g±40g at 1.3mm working stroke

.Full stroke: 1.5mm

.Life test: 1000,000 cycles (working stroke)

Electrical:

.Rated current & voltage: DC 12V; 2A Max.


.Contact resistance: 30 milliohm Max.

To ensure the best usage, please operate it based on the working height.

Based on the engineering drawings, shall not exceed the maximum allowed compression.



Approve Sign

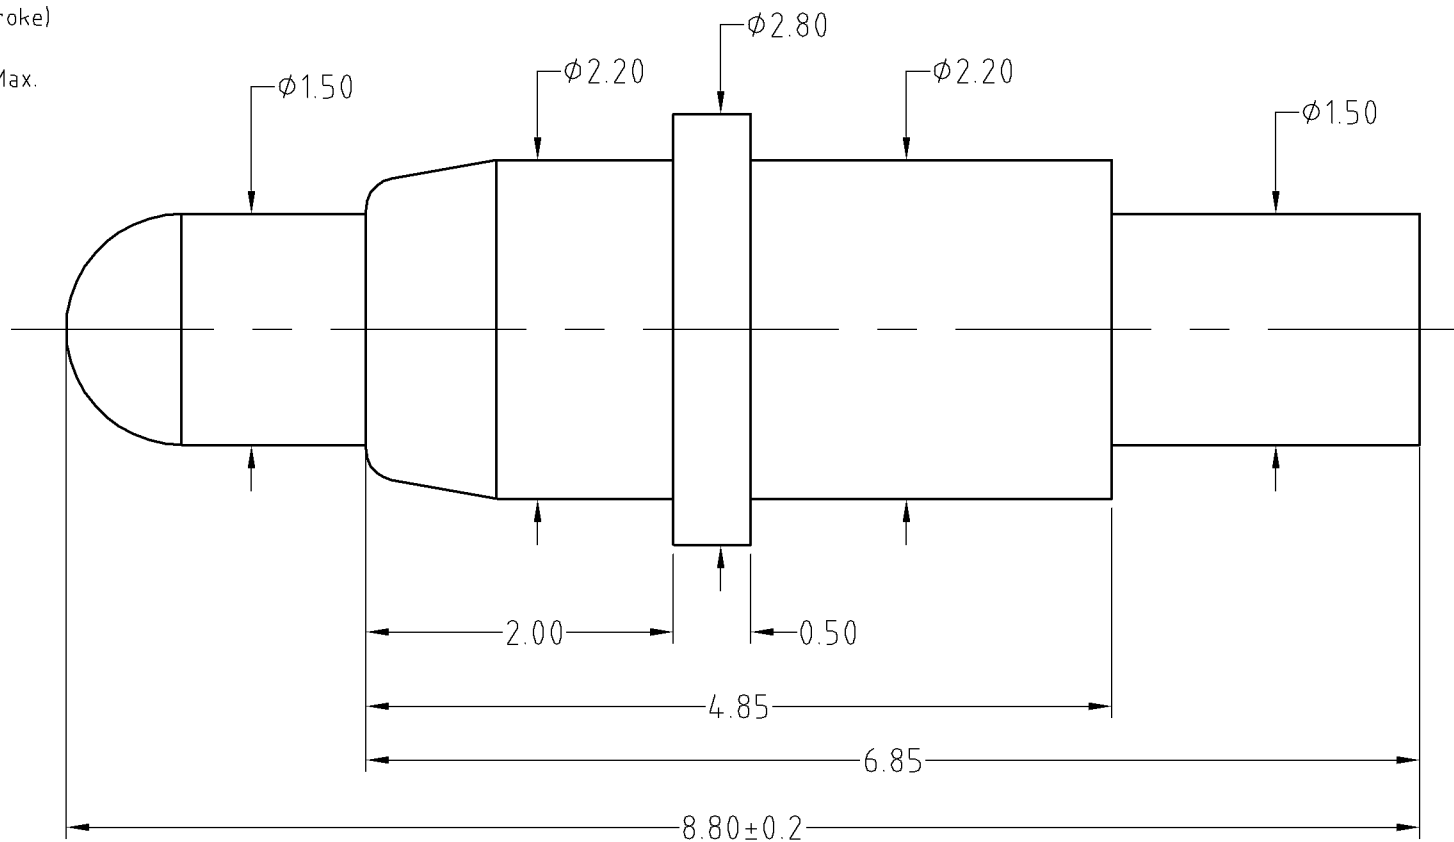

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		CFE 东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.	
ANGEL	$\pm 1^\circ$	A4				
0~6	± 0.05		SHEET: 1 of 1		PART NO.	BP03413
6~30	± 0.10	DRAW			FILE NAME	BP03411
30~150	± 0.15	CHECK				
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO			TITLE	Pogo pin connector

	D0	2013.05.30	NEW
ECN(DCN) NO.	REV	DATE	DESCRIPTION