

1

2

3

4

Note:

Materials:

.Plunger: Brass 5u" Au over Ni

.Barrel: Brass 3u" Au over Ni

.Spring: SUS

Mechanical:

A .Contact force: 40g±10g at 1.0mm working stroke

.Life test: 20,000 cycles

Electrical:



.Rated current & voltage: DC 12V; 2A Max.

.Contact resistance: 50 milliohm Max.

To ensure the best usage, please operate it based on the working height.

Based on the engineering drawings, shall not exceed the maximum allowed compression.

Approve Sign

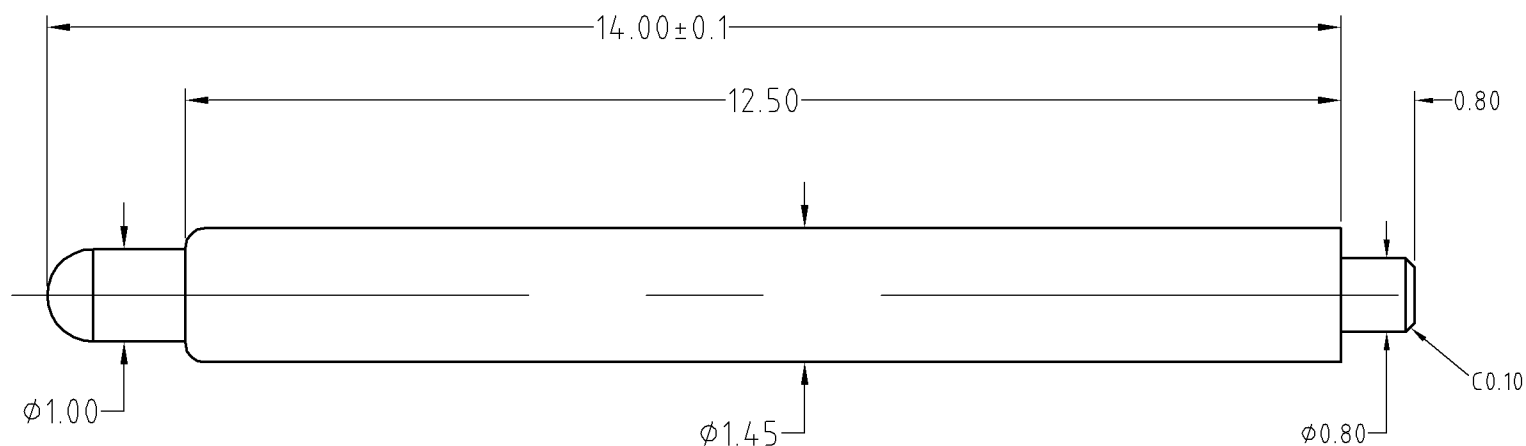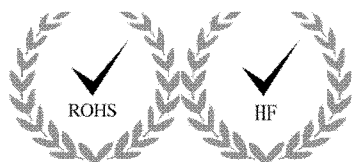

B

C

D

2014.0107002	A1	2014.01.07	修改 增加尾部 长度为0.8 外径为0.8
_____	A0	2014.01.07	NEW
ECN(DCN) NO.	REV	DATE	DESCRIPTION

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		CFE 东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.	
ANGEL	±1°	A4				
0~6	±0.05		SHEET: 1 of 1		PART NO.	BP13902
6~30	±0.10	DRAW			FILE NAME	BP139XX
30~150	±0.15	CHECK			TITLE.	Pogo pin connector
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO				